

PRODUCT DATA SHEET

NEMA MW 83-C

Class 180 - Copper - Round Conductors - Polyurethane/Polyamide coated magnet wire / winding wire.

APPLICATION

Soderon®/180 magnet wire is designed for applications requiring both high thermal resistance and low soldering temperatures.

Soderon®/180 magnet wire consists of a solder-strippable modified polyurethane film insulation over-coated with nylon.

Soderon®/180 is recommended but not limited to the following applications:

- Bobbin wound and paper section coils
- Encapsulated and molded coils
- Small motor, armatures and field coils
- Automotive coils and solenoids
- Toroidal coils
- Specialty power transformers
- Linear motors
- RF Coils

SOLDERABLE INSULATION COMPARISON:

| | Salt Water Pinhole Test | Soldering Temperature | Glass Transition Temperature | Thermo-plastic Flow |
|----------------------|-------------------------|-----------------------|------------------------------|---------------------|
| Soderon®/155 (MW 80) | OK | 390°C | Lower | Lower |
| Soderon®/180 (MW 83) | Better | 390°C | Highest | Higher |
| Solidon® (MW 78) | Poor | 470°C | Higher | Highest |

ENGINEERING HIGHLIGHTS

1. THERMAL CLASSIFICATION

Soderon®/180 magnet wire is Class 180 when measured in accordance with the ASTM-D2307 test procedure. Heat shock resistance exceeds 200°C.

2. THERMOPLASTIC FLOW

Thermoplastic flow or cut-through temperature of Soderon®/180 magnet wire is in the 225°C plus range; well above maximum process conditions found in molded coil work, trickle impregnation processes and standard pre-heat varnish cycles specified for normal Class 130, 155 and 180 systems.

3. SOLDERABILITY

Soderon®/180 magnet wire solder strips readily and much more easily than MW 78 type products. It solders consistently at temperatures as low as 390°C.

4. WINDABILITY

Flexibility and adhesion properties of the Soderon®/180 magnet wire film are more than adequate for all but the most severe fine wire winding applications.

5. ELECTRICAL

Soderon®/180 magnet wire insulation exhibits high dielectric strength retention under high humidity conditions.

6. CHEMICAL

The solvent resistant properties of Soderon®/180 are suitable for most classes 105, 130, 155 and 180 varnishes, encapsulants, and treating resins. It has improved salt water resistance compared to other solderable wires.

7. NORMAL AVAILABILITY

- Round Copper Sizes:
25-46 AWG, Single Build
25-46 AWG, Heavy Build

Please consult Magnet Wire Marketing for additional size (including metric) and build information.

PRODUCT DATA SHEET

Performance data is representative of 36 AWG heavy build copper. **

THERMAL PROPERTIES

HEAT SHOCK RESISTANCE

TYPICAL PERFORMANCE: No cracks @ 200°C
REQUIRED PERFORMANCE: 20%, 3 XD, no cracks†

SOLDERABILITY


TYPICAL PERFORMANCE: 1 second @ 390°C
REQUIRED PERFORMANCE: ≤ 5 seconds @ 390°C†

THERMAL STABILITY

TYPICAL PERFORMANCE: 189°C
REQUIRED PERFORMANCE: 180°C minimum†

THERMOPLASTIC FLOW

TYPICAL PERFORMANCE: 259°C
REQUIRED PERFORMANCE: 225°C†

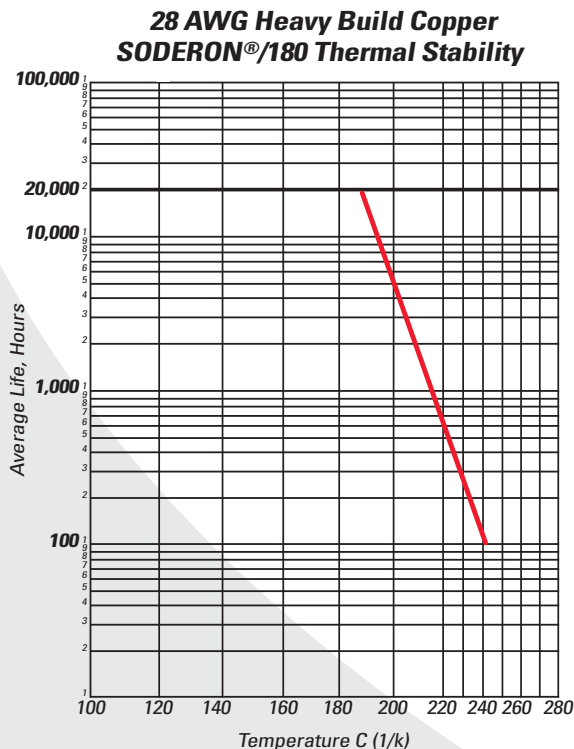

PHYSICAL PROPERTIES

ADHESION AND FLEXIBILITY

TYPICAL PERFORMANCE: No cracks
REQUIRED PERFORMANCE: 20%, 1XD, no cracks†

CONDUCTOR ELONGATION

TYPICAL PERFORMANCE: 26%
REQUIRED PERFORMANCE: 20% minimum†

ELECTRICAL PROPERTIES

CONTINUITY

TYPICAL PERFORMANCE: ≤ 1 fault/100 feet
REQUIRED PERFORMANCE: ≤ 5 faults/100 feet†

DIELECTRIC BREAKDOWN VOLTAGE

ROOM TEMPERATURE

TYPICAL PERFORMANCE: 6400 volts, avg.
REQUIRED PERFORMANCE: 2340 volts, minimum†

RATED TEMPERATURE

TYPICAL PERFORMANCE: 4900 volts, avg.
REQUIRED PERFORMANCE: 1755 volts, minimum†

** The values shown represent typical average results and are not intended to be used as design data or specification limits.

† Requirements of NEMA MW 1000; Section MW 83-C.

All Sales are subject to Essex® Standard Terms and Conditions as posted on www.superioressex.com. Copies available upon request.



Essex Group, Inc.
 1601 Wall Street
 Fort Wayne, IN 46802
 260.461.4000
 © 2008 Essex aGroup, Inc.